


Grounding Lug with U-Shape Copper Channel

- Assembly -



Fix Grounding Lug into either top or side rail channel.

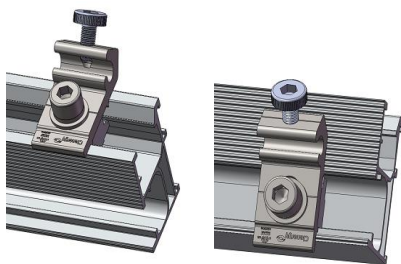

Insert U-Shape Copper Channel into Grounding Lug.



Strip earthing cable and insert the conductor into copper channel. Tighten the bolt of M6*14 to ensure the earthing cable is tight.

- Component -



Grounding Lug, with Clenergy Logo, with U-Shape Copper Channel
Part No.: EZ-GL-ST/UC (bar code:13-14030-037)

- Technical Specification -

| | |
|----------------------|---|
| Application | For Clenergy' s PV Mounting System |
| Fixing method | Fixing into ECO/T50/T110 Rail with Z module |
| Cable Size | 4, 6 and 10 mm ² |
| Dimensions | W23mm*L45mm |
| Weight | 0.095 kg |
| Packaging | 80 units per pack, 4 packs (320 units) per carton |
| Material | Lug: Hpb59-1 U-Shape Copper Channel: T2 Copper Bolt/Washer: SUS304 Z module: AL6005-T5 |
| Standard | AS NZS1170.2-2011 |

