

Grounding Lug, with U-Shape Copper Channel

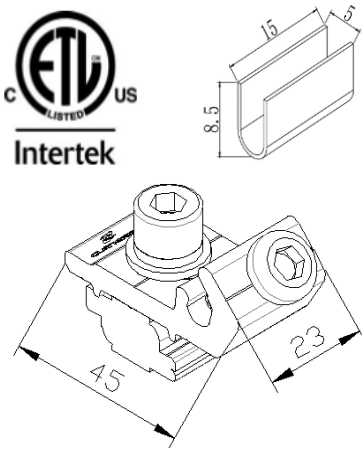
Assembly

		
<p>Fix Grounding Lug into either top or side rail channel</p>	<p>Insert U-Shape Copper Channel into Grounding Lug</p>	<p>Strip earthing cable and insert the conductor into copper channel. Tighten the bolt of M6*14 to ensure the earthing cable is tight</p>

Component


<p>Grounding Lug, with Clenergy Logo, with U-Shape Copper Channel Part No.: EZ-GL-ST/UC (bar code: 12-023-00023)</p>

Technical Specification

Application	For Clenergy' s PV Mounting System	
Fixing method	Fixing into Pro/ECO/T50/T110 Rail with Z module	
Max Cable Size	10 mm ²	
Dimensions	W23mm*L45mm	
Weight	0.096 Kg	
Packaging	80 units per pack, 4 packs (320 units) per carton	
Material	Lug: Hpb59-1 U-Shape Copper Channel: T2 Copper Bolt/Washer: SUS304 Z module: AL6005-T5	
Certification	Approved by ETL according to UL467-2013	
Standard	BS 7671 / VDE 0100	