
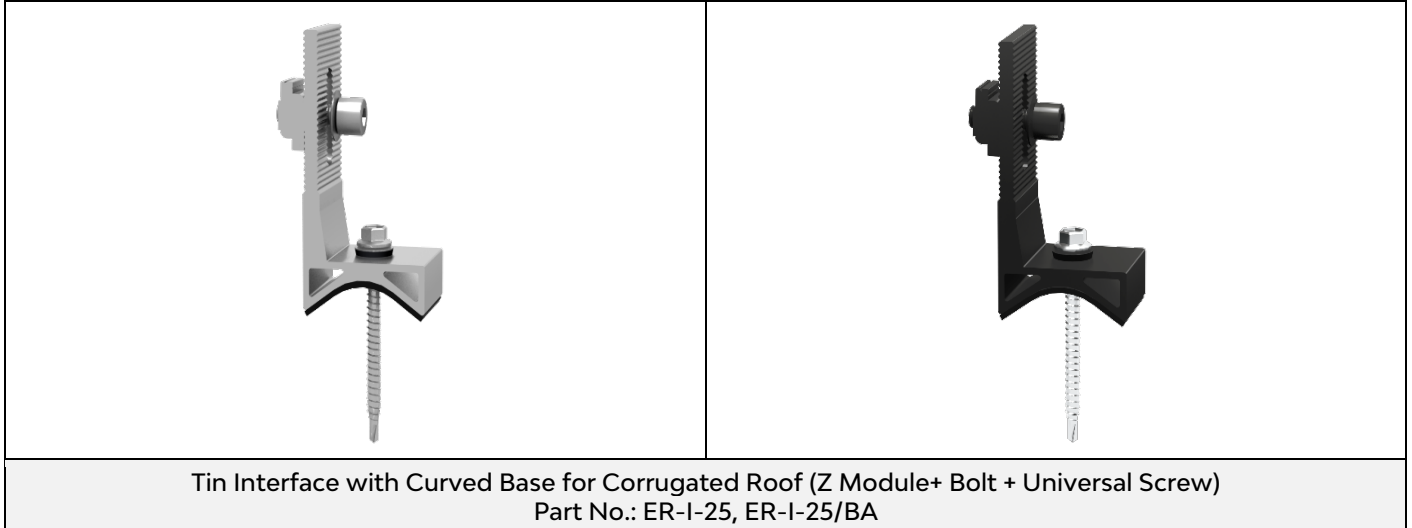


SolarRoof, Tin Interface with Curved Base for Corrugated Roof

Component

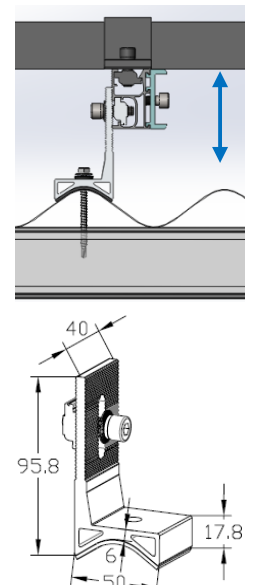

Technical Specification

| | | |
|---------------------|---|---|
| Application | Corrugated Tin Roof |  <p>Clearance 89~104mm</p> |
| Purlin requirement | Metal or Timber purlin | |
| Screw specification | Buildex 14-11 x 70 (14 gauge, 6.3 mm, 11 TPI, 70 mm long) Hex Head Zips Screw | |
| EPDM | Pre-fitted (2mm thickness) | |
| Dimensions | L40mm*W50mm*H95.8mm | |
| Packaging | 40 units per pack; 4 packs (160 units) per carton | |
| Material | Main Structure: AL6005-T5 Bolts/washers/nuts: SUS 304 | |
| Weight | 0.139 kg | |
| Color | Silver (anodized, no less than 10 µm) Black (full anodized) | |
| Standard | AS NZS1170.2-2011 National Building Code of Canada (NBC) 2020 | |