



SolarRoof, Tin Interface with ezClick connection for ECO-Rail

Component

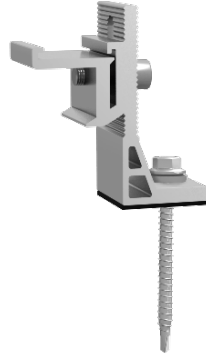

Tin Interface A with ezClick connection for ECO-Rail
Part Number: ER-I-05A/EZC/ECO

Technical Specification

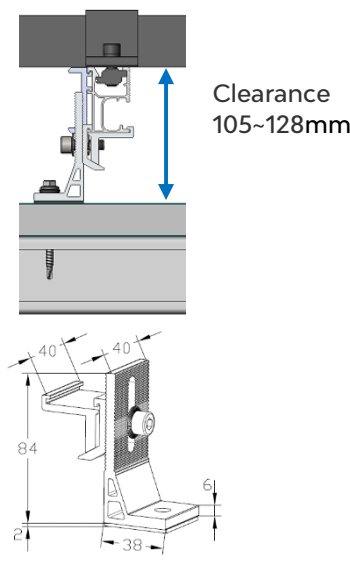Application	Trapezoidal or Corrugated Tin Roof	 <p>Clearance 105~128mm</p>
Purlin requirement	Metal or Timber purlin	
Screw specification	Buildex 14-11 x 70 (14 gauge, 6.3 mm, 11 TPI, 70 mm long) Hex Head Zips Screw	
EPDM	Pre-fitted (2mm thickness)	
Dimensions	L40mm*W38mm*H84mm	
Packaging	40 units per pack;4 packs (160 units) per carton	
Weight	152 g	
Material	Main Structure: AL6005-T5 Bolts/washers/nuts: SUS 304	
Color	Silver (anodized, no less than 10 μm)	
Standard	AS NZS1170.2-2011 National Building Code of Canada (NBC) 2020	