



## Inter Clamp & End Clamp, Standard 25mm


### Assembly

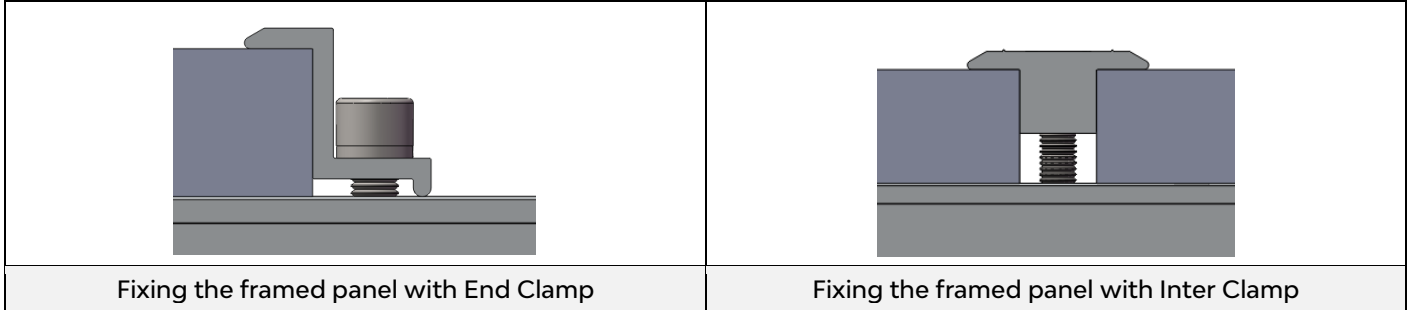

### Component

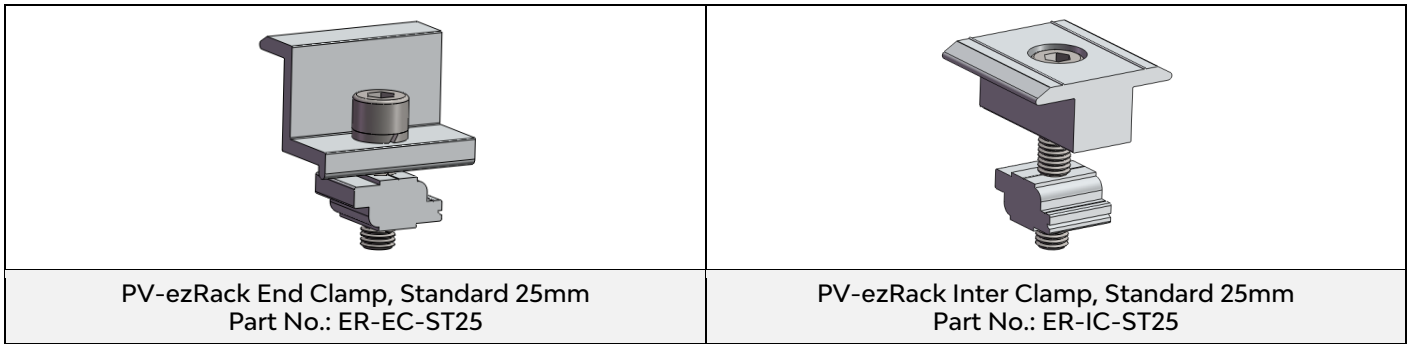

### Technical Specification
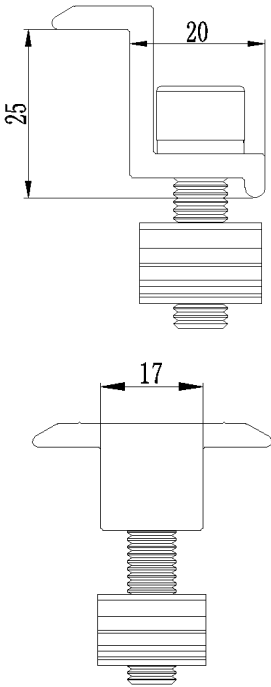
<b>Application</b>	ER-EC-ST25 is for framed PV Modules of 25-27mm in height (with ECO-Rail and T-Rail); ER-IC-ST25 is for framed PV Modules of 19-26mm (with ECO-Rail)/21-26mm (with T-Rail) in height;	
<b>Requirement</b>	ER-EC-ST25 needs 20 mm space on each side of the Rail; ER-IC-ST25 needs 18 mm space between PV Modules;	
<b>Weight</b>	ER-EC-ST25: 45.7g ER-IC-ST25: 71g	
<b>Packaging</b>	ER-EC-ST25: 100 units per pack, 4 packs (400 units) per carton; ER-IC-ST25: 100 units per pack, 4 packs (400 units) per carton;	
<b>Material</b>	Main Structure: AL6005-T5 Fasteners: SUS 304	
<b>Color</b>	Silver (anodized, no less than 10µm)	
<b>Standard</b>	AS NZS1170.2-2011 National Building Code of Canada (NBC) 2020	