





Inter and End Clamp Standard 35 and 40 mm



Assembly

	
Fixing the framed panel with End Clamp	Fixing the framed panel with Inter Clamp

Component

	
End Clamp Part No.: ER-EC-ST35, ER-EC-ST40	Inter Clamp Part No.: ER-IC-ST35, ER-IC-ST40

Technical Specification

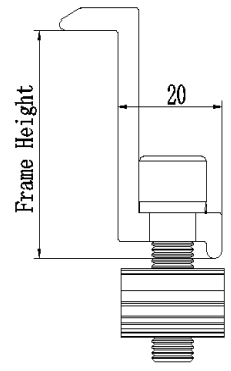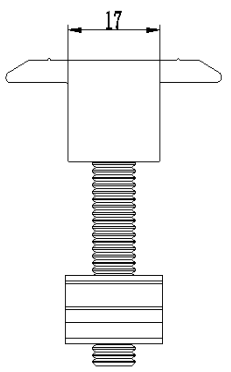Application	ER-EC-ST35 is for framed PV Modules of 35-37mm in height (with ECO-Rail and T-Rail) ER-EC-ST40 is for framed PV Modules of 40-42mm in height (with ECO-Rail and T-Rail) ER-IC-ST35 is for framed PV Modules of 29-36mm (with ECO- Rail) / 31-36mm (with T-Rail) in height ER-IC-ST40 is for framed PV Modules of 34-41mm (with ECO- Rail) / 36-41mm (with T-Rail) in height	 
Requirement	ER-EC-ST needs 20mm space on each side of the Rail ER-IC-ST needs 18mm space between PV Modules	
Recommended Torque	16-20N·m	
Weight	ER-EC-ST35: 0.054 Kg; ER-EC-ST40: 0.057 Kg ER-IC-ST35: 0.072Kg; ER-IC-ST40: 0.077 Kg	
Packaging	ER-EC-ST: 100 units per pack, 4 packs (400 units) per carton ER-IC-ST: 100 units per pack, 4 packs (400 units) per carton	
Material	Main Structure: AL6005-T5 Fasteners: SUS 304	
Color	Silver (anodized, no less than 10 μm)	
Standard	AS NZS1170.2-2011 National Building Code of Canada (NBC) 2020	