





## Universal Clamp for Frame Height 30-46mm

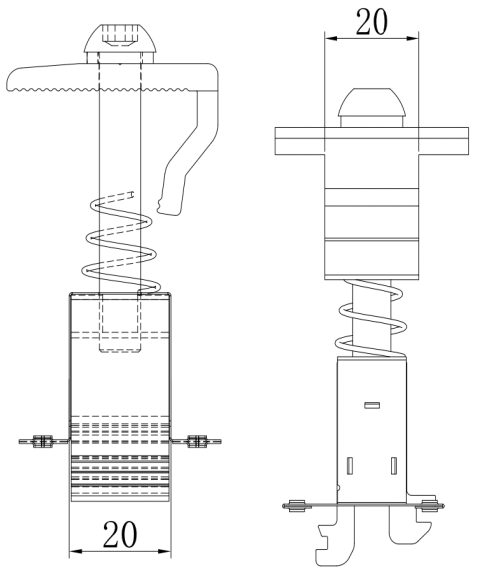
### Assembly

	
Used as End Clamp	Used as Inter Clamp

### Component

	
Universal Clamp for Frame Height 30-46mm Part No.: C-U/30/46, C-U/30/46-G	

### Technical Specification

<b>Application</b>	C-U/30/46 and C-U/30/46-G are for framed PV Modules of 30-46mm in height	
<b>Requirement</b>	C-U/30/46 and C-U/30/46-G need 20mm space on each side of the Rail, need 20mm space between PV Modules;	
<b>Recommended Torque</b>	End Clamp: 13-14N·m Inter Clamp: 18-20N·m	
<b>Weight</b>	C-U/30/46: 0.068 kg C-U/30/46-G: 0.072 kg	
<b>Packaging</b>	C-U/30/46: 70 units per pack, 4 packs (280 units) per carton C-U/30/46-G: 60 units per pack, 4 packs (240 units) per carton	
<b>Material</b>	Main parts: AL6005-T5 Fasteners and Grounding Clip: SUS 304	
<b>Color</b>	Silver (anodized, no less than 10 μm)	
<b>Standard</b>	AS NZS1170.2-2011 National Building Code of Canada (NBC) 2020	