



Assembly

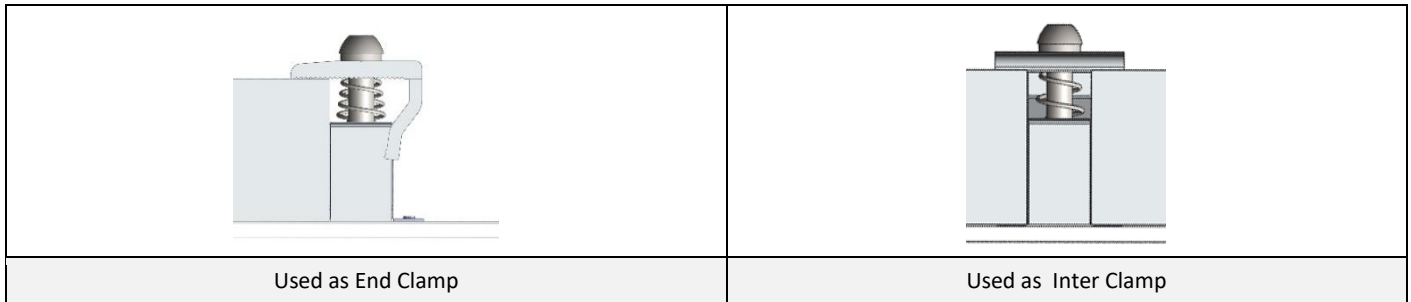

Component

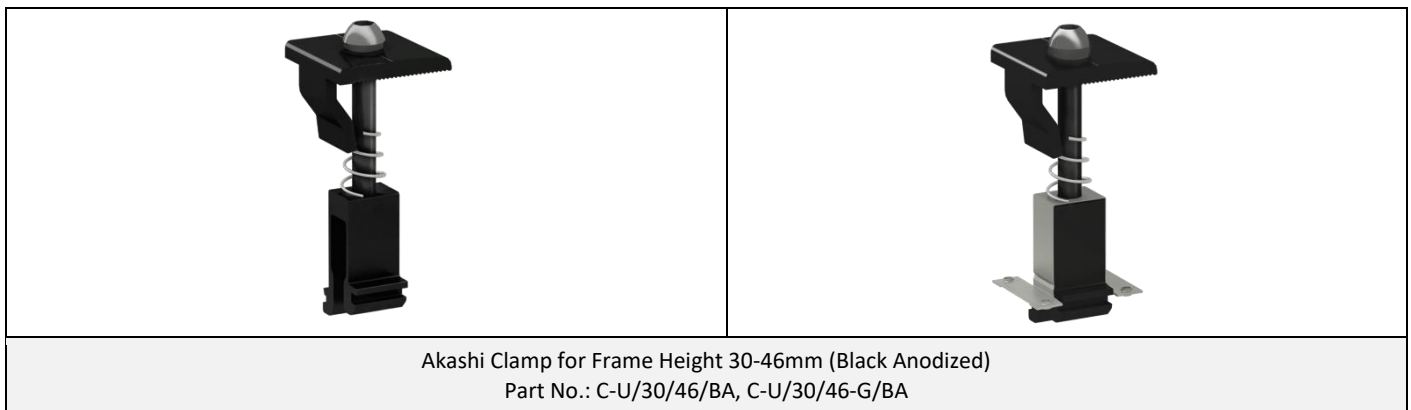

Technical Specification

Application	C-U/30/46/BA and C-U/30/46-G/BA are for framed PV Modules of 30-46mm in height	
Requirement	C-U/30/46/BA and C-U/30/46-G/BA need 20mm space on each side of the Rail, need 20mm space between PV Modules;	
Recommended Torque	13-14N•m	
Weight	C-U/30/46/BA: 0.068 kg C-U/30/46-G/BA: 0.072 Kg	
Packaging	30 units per pack, 4 packs (120 units) per carton;	
Material	Main parts: AL6005-T5 Fasteners and Grounding Clip: SUS 304	
Color	Black (full anodized, no less than 10 μm)	
Standard	NBC 2020 OBC 2012/2022 & OBC 2024 BCBC 2018 & BCBC 2024 NBC(AE) 2019 & NBC(AE) 2023 NBC 2010 (Manitoba Amendments) CAN/CSA S157-17 CAN/CSA S16-14 (R2019)	