


PV-ezRack


Klip-lok Interface

Black Anodized

- Assembly -

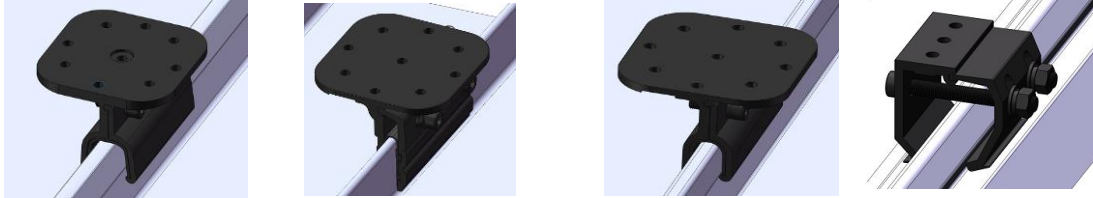


- Component -

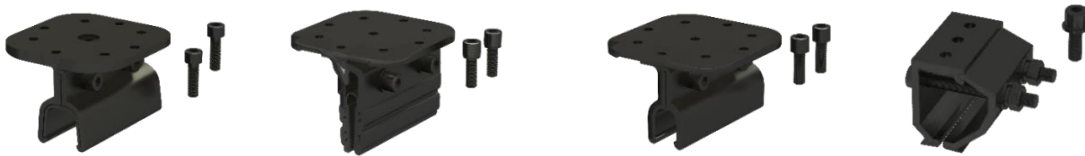

Part No.: ER-I-09/BA, ER-I-29/BA, ER-I-32/BA, ER-I-34/BA


- Technical Specification -

Roof type	Lysaught Klip Lok 700 Classic, Lysaught Klip-Lok 700 High Strength, Lysaught Klip-Lok 406, Stramit Speed Deck Ultra, Stramit Speed Deck 500, Fielders Kingklip 700, Stratco Topdeck 700, Metroll Metlok 700, Metroll Metlok 500, Revolution Maxline 340, Steeline Lokdek 680, Steeline Steel-Rib 500 (ST28), BlueScope Rev-Klip 700, Lysaught LongLine 305
Fixing method	Fixing on crown/rib of metal sheet
Dimensions	ER-I-09/BA: L100mm*W100mm*H61.3mm ER-I-29/BA: L100mm*W100mm*H69.7mm ER-I-32/BA: L100mm*W100mm*H57.9mm ER-I-34/BA: L60mm*W88mm*H55.5mm
Weight	ER-I-09/BA: 0.395 Kg; ER-I-29/BA: 0.419 Kg ER-I-32/BA: 0.342 Kg; ER-I-34/BA: 0.225 Kg
Packaging	ER-I-09/BA: 12 units per pack; 4 packs (48 units) per carton ER-I-29/BA: 16 units per pack; 2 packs (32 units) per carton ER-I-32/BA: 16 units per pack; 4 packs (64 units) per carton ER-I-34/BA: 24 units per pack; 4 packs (96 units) per carton
Material	Main parts: AL6005-T5 Fastener: Screws and Washers are made of SUS 304; Nuts are made of carbon steel with Zinc-nickel alloy coating Rubber Pad: EPDM
Color	Black (full anodized, no less than 10 µm)
Standard	AS NZS1170.2-2011

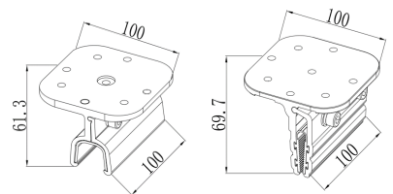

ER-I-09/BA

ER-I-29/BA

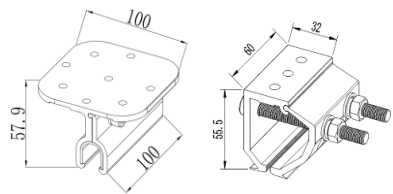

ER-I-32/BA

ER-I-34/BA